




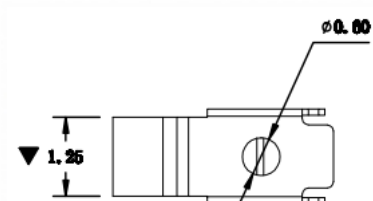


ROHS



3D展示

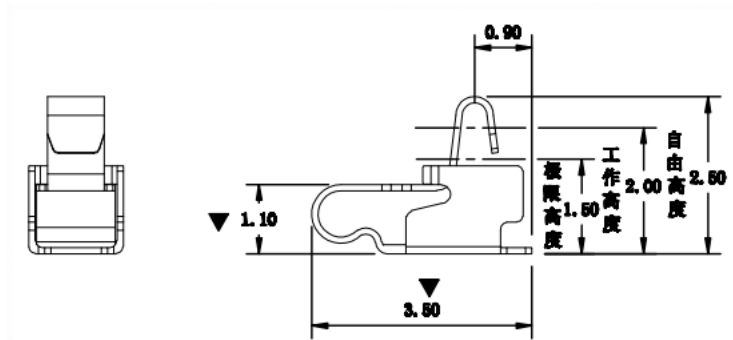

尺寸公差 ±0.05

冲压技术要求：

1. 材质：不锈钢 SUS304, T=0.10±0.005;
2. 端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
3. 扭曲45°/1000mm,拱形5mm/1000mm;
4. 标有“√”符号的为重点控制和检验尺寸;
5. 未标注之R MAX R0.13;
6. 预断45°来回两次即可拆断,电镀须满足48小时盐雾测试;
7. 寿命测试>2万次,产品弹力要求在60gf~80gf之间;
8. 镀底50u"min,焊接区域镀金,接触区域镀金3u"min;
9. 每盘接头不可超过三个,接头部位需标示以利识别;

深圳市盛阳通科技有限公司

GENERAL TOLERANCE	
.X ±0.15	.X* ±1.0°
.XX ±0.06	.XX* ±0.5°
.XXX ±0.006	.XXX* ±0.21

SCALE:	1:1
UNIT:	m
SIZE:	A4
	日

PRINT	DATE
CHECK	DATE
APPROVE	DATE

Part No.	
Part No. (IMPROVED U E)	
WOYO-377-C	

TITLE:
天线射频弹片-SMT型
3.5mmX1.50mmX2.50mm

REV
SHEET