

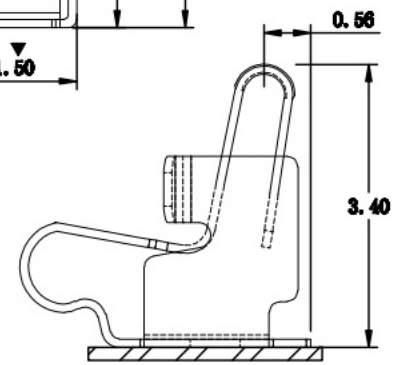

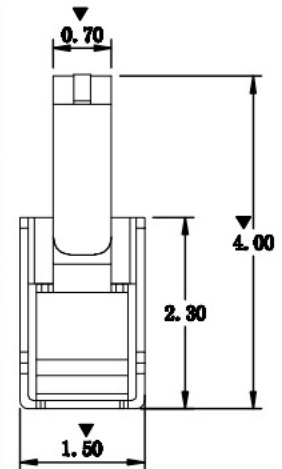



3D展示

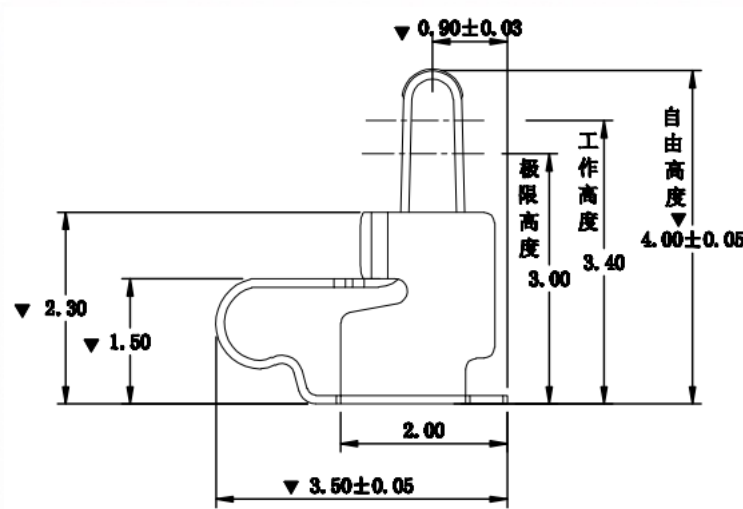

正常工作高度 H=3.40mm

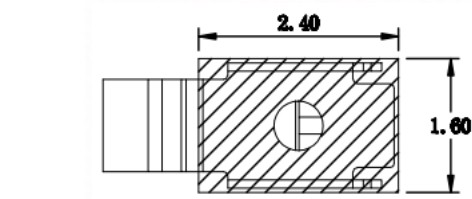

焊盘尺寸
尺寸公差 ±0.05

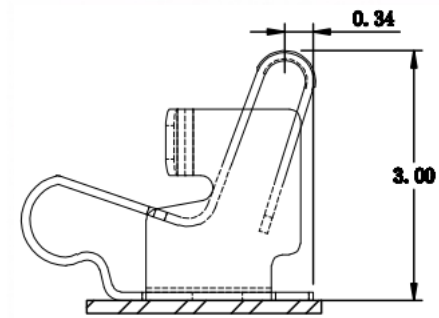

极限工作高度 H=3.00mm

- 冲压技术要求:
- 1.材质:不锈钢SUS304,T=0.10±0.005;
 - 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
 - 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
 - 4.标示有"▼"符号的为重点控制和检验尺寸;
 - 5.未标注之R MAX R0.13;
 - 6.预断45°来回两次即可折断,电镀须满足48小时盐雾测试;
 - 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
 - 8.镀底50u"min,焊接区域镀金,接触区域镀金3U"MIN
 - 9.每盘接头不可超过三个,接头部位需标示以利识别;

深圳市盛阳通科技有限公司

GENERAL TOLERANCE	
.X ±0.15	.X° ±1.0°
.XX ±0.05	.XX° ±0.6°
.XXX ±0.005	.XXX° ±0.2°

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAW	DATE.
CHECK	DATE.
APPROVE	DATE.

PARTS NO. (INTENDED USE)
AT1000Y100-400

TITLE:
天线射频弹片.SMT型
3.50mmX1.50mmX4.00mm

REV
SHEET