


Rev	Number	Description	Date	Drawn	Checked	Approved

- 冲压技术要求:
- 1.材质:不锈钢SUS304, $T=0.10\pm0.005$;
 - 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
 - 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
 - 4.标示有“▼”符号的为重点控制和检验尺寸;
 - 5.未标注之R MAX R0.13;
 - 6.预断45°来回两次即可折断,电镀须满足48小时盐雾测试;
 - 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
 - 8.镀底50u"min,焊接区域镀金,接触区域镀金3U"MIN
 - 9.每盘接头不可超过三个,接头部位需标示以利识别;

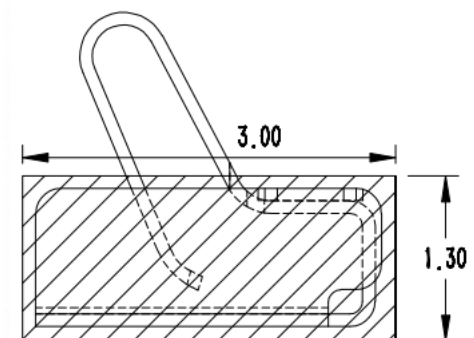

RECOMMENDED PCB LAYOUT
(General Tolerance:0.05mm)

深圳市盛阳通科技
有限公司

GENERAL TOLERANCE	
$L\pm0.40$	
$L\pm0.25$	$L'\pm2.0'$
$.0.13$	$.X'\pm1.0'$
$.XX\pm0.05$	$.XX'$

SCALE:	1:1
VIT:	
SIZE:	M4

SIZE:	
CHECK	
APPROVE	

DATE:	
DATE:	
DATE:	

SWG. NO	
W670-C27	
PARTS NO. (INTENDED USE)	

TITLE	
侧接弹片	
L2.7mm*W1.0mm*H2.50mm	

BY	
SHEET	