






CUSTOMER DRAWING

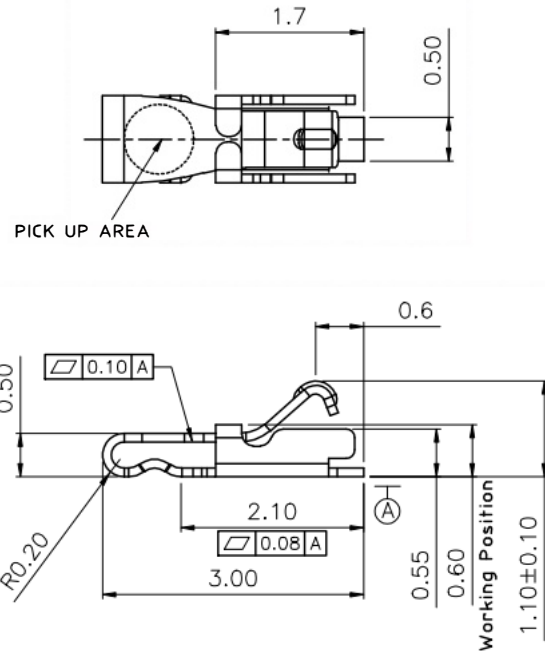

NOTES:


- MATERIAL AND FINISH
 - MATERIAL: STAINLESS STEEL, T=0.10MM.
 - FINISH: GOLD PLATED ON CONTACT AND SOLIDER AREA.
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 1.0A
 - VOLTAGE RATING: 15V AC/DC MAX..
 - CONTACT RESISTANCE: 100 MILLIOHMS MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC, 1 MINUTE
- MECHANICAL PERFORMANCE:
 - NORMAL FORCE: 0.5N MIN. ON WOeking POSITION,
 - DURABILITY: 500 CYCLES.
- OPERATION TEMPERATURE: -25°~+85°
- PACKING: REEL & TAPE

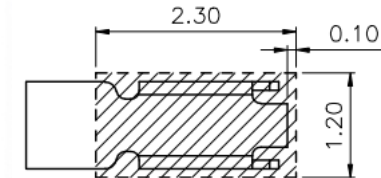

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ± 0.05

深圳盛阳通科技有限公司

B	1503001	0.50 TO 0.65	CJ.Qian		
A	1312001	OFFICIAL VERSION	CJ.Qian		
X1		PRELIMINARY	CJ.Qian		
REV.	ECN NO.	DESCRIPTION	DWG.	CHECK	APPR.

UNIT	mm	DRAWN	CJ.Qian	2015.03.25	深圳盛阳通科技有限公司										
GENERAL TOLERANCE		CHK.													
DISTANCE		APPD.			TITLE	ANTENNA RF SPRING, SMT Au PLATED, L3.0*W1.0*H1.1mm									
X.	±0.30	MATERIAL	SEE NOTES												
.X	±0.20														
.XX	±0.15														
.XXX	±0.10	FINISH	SEE NOTES		PART NO.	woyo-1011									
ANGLE					DWG. NO.										
X.	±2.0°				SCALE	1:1	SIZE	A4	SHEET	1 of 1	REV.	B			
.X	±1.0°														

