







Rev	Number	Description	Date	By	Check	Approved

NOTES:

- MATERIAL AND FINISH
 - MATERIAL: STAINLESS STEEL, T=0.10MM.
 - FINISH: GOLD PLATED ON CONTACT AND SOLDER AREA.
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 1.0A
 - VOLTAGE RATING: 15V AC/DC MAX...
 - CONTACT RESISTANCE: 100 MIILOHMS MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC, 1 MINUTE
- MECHANICAL PERFORMANCE:
 - NORMAL FORCE: 0.5N MIN. ON WOeking POSTION,
 - DURABILTY: 500 CYCLES.
- OPERATION TEMPERATURE: - 25°~ + 85°
- PACKING: REEL & TAPE

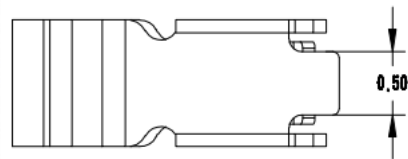

3D展示

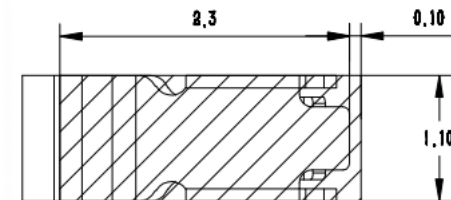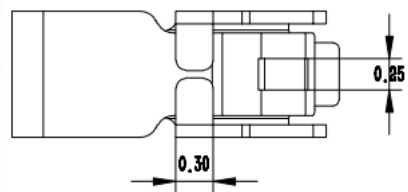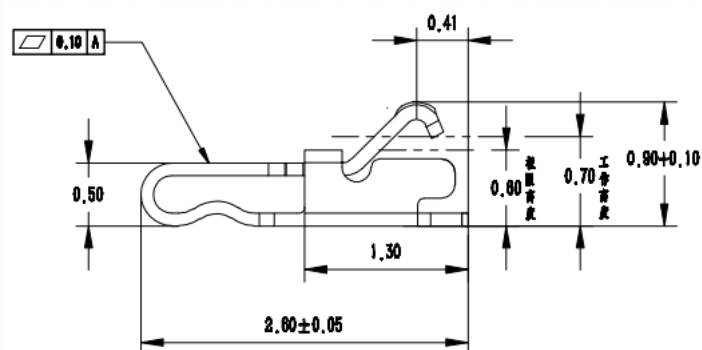

RECOOREO POBLNYOIT
ENEAL TLERNCE ± 0.05

TOLERANCE		SCALE:	81ZR:	MR:	PARTS NO.(INTENDED USE) W O Y O - 1011-B	TITLE SMT射 频 天 线 弹 片 L2.80mmV L 00mwHl. Imm	RV
π ±0.40		1:1					
Z ±0.26	L * ±2 σ						
±0.13	T ±1.0						
+ 0.0%	π a	A4	中母	APPROVE			