

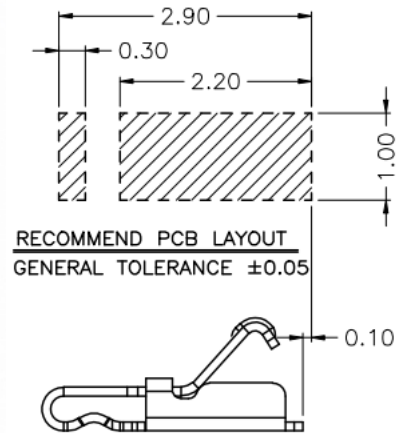

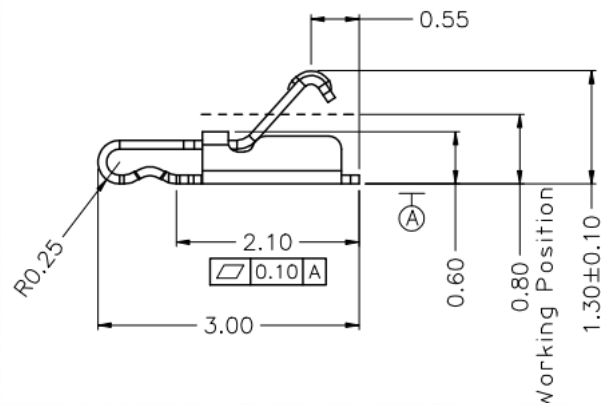

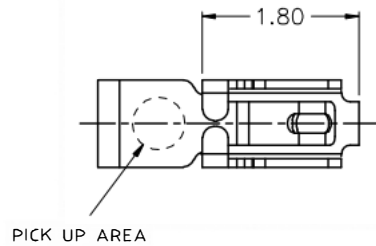


CUSTOMER DRAWING



NOTES:

1. MATERIAL AND FINISH
 - 1.1 MATERIAL: STAINLESS STEEL,T=0.10MM.
 - 1.2 FINISH: GOLD PLATED ON CONTACT AREA.
2. ELECTRICAL PERFORMANCE:
 - 2.1 CURRENT RATING: 1.0A
 - 2.2 VOLTAGE RATING: 15V AC/DC MAX..
 - 2.3 CONTACT RESISTANCE: 100 MILLIOHMS MAX.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC, 1 MINUTE
3. MECHANICAL PERFORMANCE:
 - 3.1 NORMAL FORCE: 0.5±0.1N ON WOeking POSITION,
 - 3.2 DURABILITY: 500 CYCLES.
4. OPERATION TEMPERATURE: -25'~+85'
5. PACKING: REEL & TAPE

UNIT	mm	DRAWN	CJ.Qian	2013.03.12	深圳盛阳通科技有限公司							
GENERAL TOLERANCE		CHK.										
DISTANCE		APPD.			TITLE	ANTENNA RF SPRING, SMT Au PLARING, L3.0*W1.0*H1.3mm						
X.	±0.30	MATERIAL	SEE NOTES									
.X	±0.20											
.XX	±0.15											
.XXX	±0.10	FINISH	SEE NOTES		PART NO.	W0Y0-1013						
ANGLE					DWG. NO.							
X.	±2.0°				SCALE	1:1	SIZE	A4	SHEET	1 of 1	REV.	X1
.X	±1.0°											

X1	ECN NO.	PRELIMINARY DESCRIPTION	CJ.Qian	DWG.	CHECK	APPR.
REV.						