



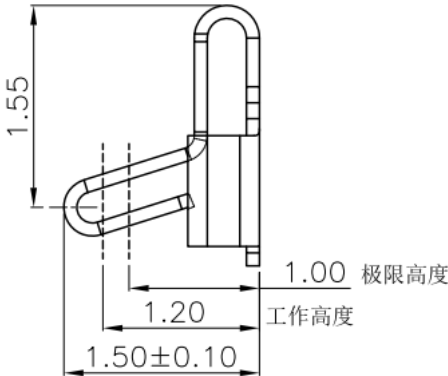



- 备注:
- 1. 材质: SUS T=0.1mm
 - 2. 电镀: 接触区与焊接区镀金1u"
 - 3. 额定电流: 1A
 - 4. 额定电压: 10V DC
 - 5. 接触电阻: 80mΩ Max
 - 6. 机械寿命: 1500 Cycles
 - 8. 盐雾测试: 24H



建议焊盘尺寸



自由公差				设计	深圳市盛阳通科技有限公司	
长度尺寸		角度尺寸				
X.	±0.25	X.	±2.0°	审核	品名	2.0*1.15*1.5H
X.XX	±0.20	X.XX	±1.0°			
X.XX	±0.15	X.XX	±0.5°			
XXX	±0.10	XXX	±0.5°	核准	料号	WORO-2215(新款)
单位 mm		比例 1:1				
A4						

A1	初版发行		
设计	修改说明	ECN编号	