







由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

ROHS

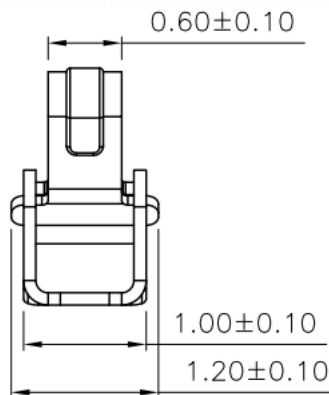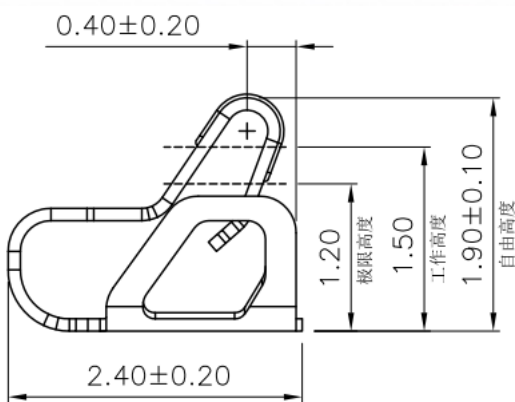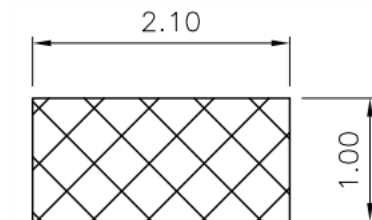

推荐焊盘尺寸

备注:

1. 材质: SUS T=0.1mm
2. 电镀: 接触区与焊接区镀金1u"
3. 额定电流: 1A
4. 额定电压: 10V DC
5. 接触电阻: 80mΩ Max
6. 机械寿命: 1500 Cycles
8. 盐雾测试: 24H

深圳市盛阳通科技有
限公司

GENERAL TOLERANCE

.X ±0.15	.X* ±1.0°
.XX ±0.05	.XX* ±0.5°
.XXX ±0.005	.XXX* ±0.2°

SCALE:


1:1

UNIT:

mm

SIZE:

A4



DRAWN

DATE:

DWG NO.

CHECK

DATE:

APPROVE

DATE:

PARTS NO.(INTENDED USE)

WOYO-241219

TITLE:

WOYO-241219弹
片
2.4X1.2X1.9

REV

SHEET