

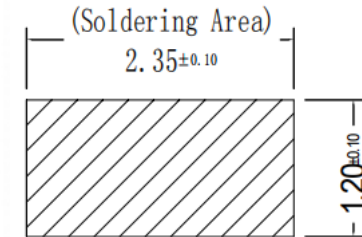

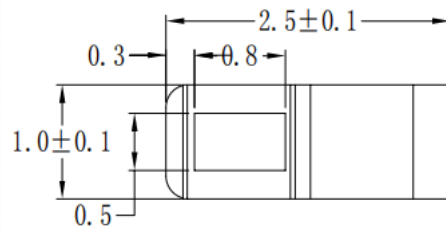
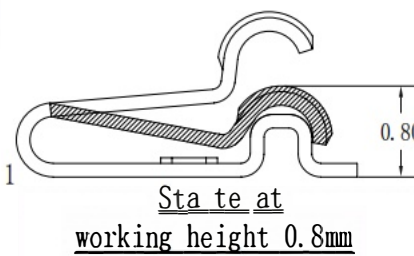
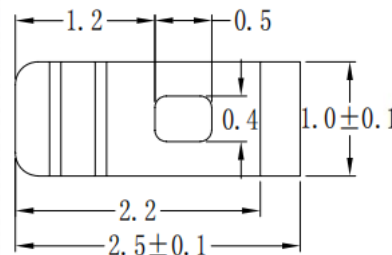



PART NO: XYT-2515A

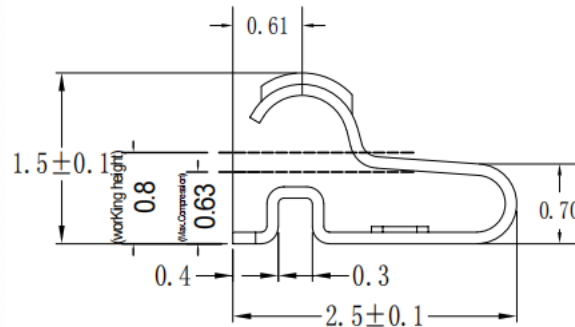

**RECOMMENDED PCB LAYOUT**  
(General Tolerance:  $\pm 0.05\text{mm}$ )



NOTES:

1. MATERIAL: STAINLESS STEEL,  $T=0.10\text{mm}$
2. FINISH: NICKEL 50-100u" UNDER PLATED  
1~3u' MIN Au ALL AROUND
3. ALL RADII TO BE R0.15, UNLESS SPECIFIED OTHERWISE
4. BURR: 0.05 MAX
5. TWIST: 90°/1000
6. CAMBER: 10/1000
7. GENERAL TOLERANCE (Unlabelled)  $\pm 0.10$
8. ANY DENT AND CRACK ON CONTACT AREA ARE NOT ACCEPTABLE.
9. MATERIAL SHOULD BE FULFILLED ROHS CRITERION
10. DIMENSION MARKED WITH ARE CRITICAL DIMENSION

深圳市盛阳通科技有限公司

| 第三角法              | 品名 | 弹片             | 客户料号 | WIOYO-2515A | 日期 | 2015/06/18 | 单位 | mm    |
|-------------------|----|----------------|------|-------------|----|------------|----|-------|
| 未注公差参见标准          | 规格 | 2.5*1.0*1.5H弹片 | 表面处理 | 镀金          | 绘图 | 肖定坤        | 比例 | 1:1   |
| 0 = $\pm 0.15$    | 材质 |                | 图号   | 001         | 审核 | 刘晓军        | 版本 | REV:A |
| 0.0 = $\pm 0.05$  |    |                |      |             | 确认 |            |    |       |
| 0.00 = $\pm 0.02$ |    |                |      |             |    |            |    |       |
| 0.000 = -         |    |                |      |             |    |            |    |       |
| 请勿实测图纸            |    |                |      |             |    |            |    |       |