



由 Autodesk 教育版产品制作




E						
REV	ECN Num	Description	Date	Drawn	Checkd	Approved



3D展示


冲压技术要求:

- 1.材质:不锈钢SUS304, $T=0.10\pm0.005$;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有"▼"符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.预断45°来回两次即可折断,电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50u"min,焊接区域镀金,接触区域镀金3U"MIN
- 9.每盘接头不可超过三个,接头部位需标示以利识别;

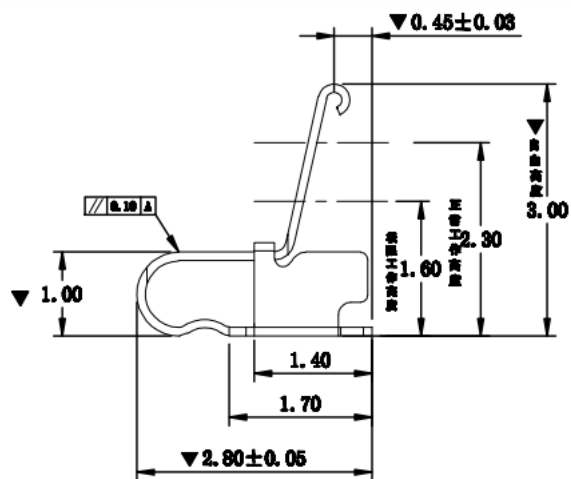

RECOMMENDED PCB LAYOUT

General Tolerance:0.05mm



原281025模具增款

深圳市盛阳通科
技有限公司

GENERAL TOLERANCE	
.X ±0.15	.X ±1.0'
.XX ±0.05	.XX ±0.5'
.XXX ±0.005	.XXX ±0.2'

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	DATE.
CHECK	DATE.
APPROVED	DATE.

PARTS NO. (INTENDED USE)
W010-281030

TITLE:
天线射频弹片. SMT型
2.8mmX1.00mmX3.00mm

REV
SHEET