


ROHS


REV	EQN	REV	DATE	Drawn	Checked	Approved





3D展示

冲压技术要求:

- 1.材质:不锈钢SUS304, $T=0.10\pm0.005$;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03
- 3.扭曲: $4.5^{\circ}/1000\text{mm}$,拱形 $5\text{mm}/1000\text{mm}$;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.预断 4.5° 来回两次即可折断,电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50u"min,焊接区域镀金,接触区域镀金3U"MIN
- 9.每盘接头不可超过三个,接头部位需标示以利识别;

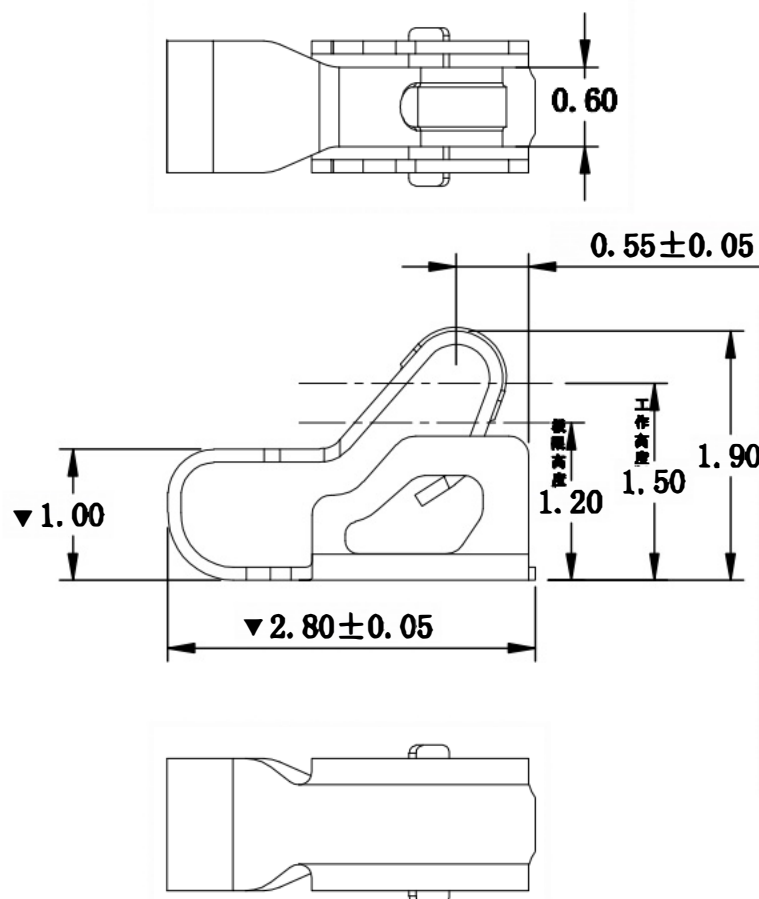

自由高度

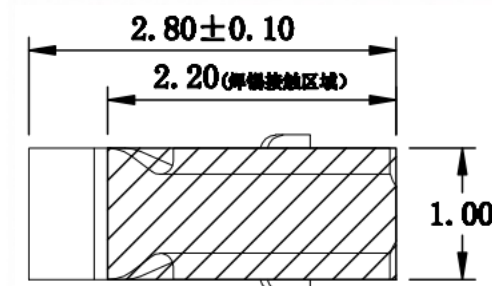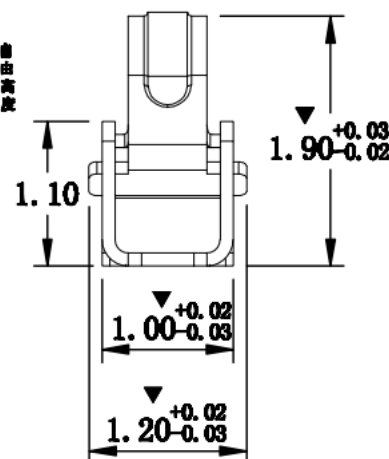RECOMMENDED PCB LAYOUT
Tolerance:0.05mm深圳市盛阳通科技
有限公司

GENERAL TOLERANCE	
.X ± 0.15	.X° $\pm 1.0^{\circ}$
.XX ± 0.05	.XX° $\pm 0.5^{\circ}$
.XXX ± 0.005	.XXX° $\pm 0.2^{\circ}$

SCALE:	1:1
UNIT:	mm
SIZE:	A4



DRAWN	DATE
CHECK	DATE
APPROVE	DATE

NO.
PARTS NO. (INTENDED USE)
WJYD 281219

TITLE:

2.80mmX1.00mmX1.90mm

REV

SHEET