

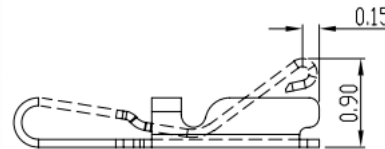



Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

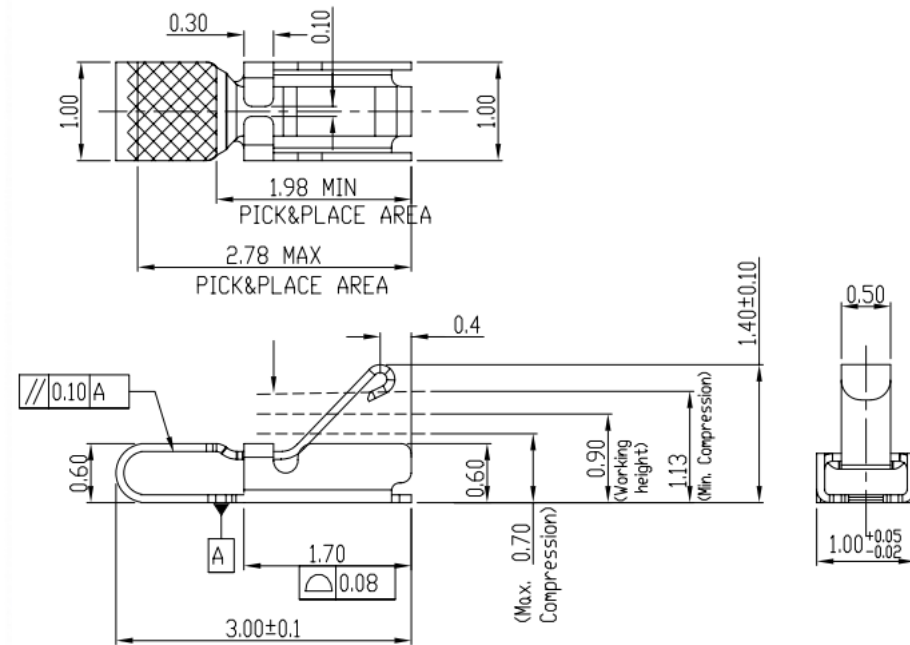

State at
working height 0.90mm

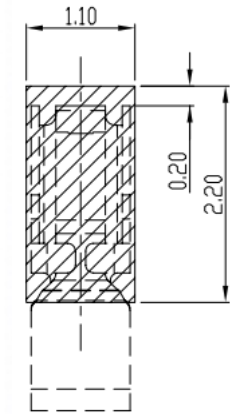

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM

NOTES:

1:MATERIAL:

1-1: STAINLESS STEEL,T=0.10mm.

2 FINISH:

2-1: 3u" MIN. Au PLATING ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER AREA,
50~150u" NICKEL UNDERPLATING OVER ALL.

3:SPECIFICATIONS:

3-1.CONTACT RESISTANCE:50mΩ MAX.
3-2.OPERATING TEMPERATURE: -20℃~+65℃.
3-3.PRE-LOAD FORCE:0.35N ON CONTACT POINT.
3-4.FORCE MAX. DEFLECTION:0.60N ON CONTACT POINT.
3-5.MAX.BEAM DEFLECTION:0.50mm. ON CONTACT POINT.

4:RF PERFORMANCE:

4-1.IMPEDANCE:50ΩHM.
4-2.VSWR: 1.5MAX.(DC~3GHz)
4-3.INSERTION LOSS: 0.6dBMAX.(DC~3GHz)

5:DURABILITY: 100 CYCLES.

6.PACKING SPECIFICATION:REEL&TAPE

深圳盛阳通科技
有限公司

GENERAL TOLERANCE

XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE:


1:1

UNIT:

mm

SIZE:

A4



DRAWN

CHEN

DATE

2012/3/12

CHECK

DATE

APPROVE

DATE

DWG. NO.

李勇

PARTS NO.(INTENDED USE)

W000-3014

TITLE

(CUSTOMER DRAWING)
RF Antenna Spring,SMT,
3.0*W1.0*H1.4mm

REV.

A

SHEET

1/1