



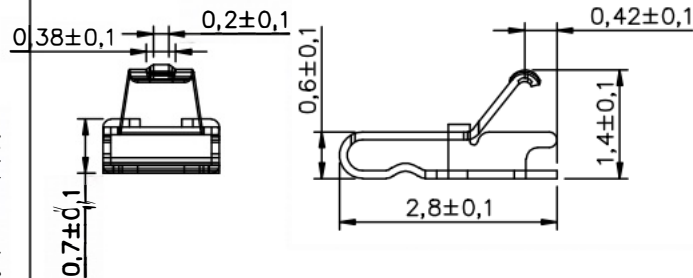

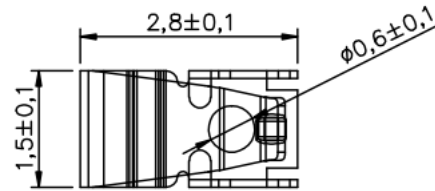


PART NO: **XYT-3145**

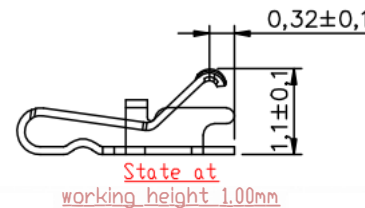

RECOMMENDED PCB LAYOUT
DEFAULT TOLERANCE IS : ±0.05



NOTES:

1. MATERIAL: STAINLESS STEEL, T=0.10mm
2. FINISH: NICKEL 50-100u" UNDER PLATED
1~3u' MIN Au ALL AROUND
3. ALL RADII TO BE R0.15 , UNLESS SPECIFIED OTHERWISE
4. BURR: 0.05 MAX
5. TWIST: 90°/1000
6. CAMBER: 10/1000
7. GENERAL TOLERANCE (Unlabelled) ±0.10
8. ANY DENT AND CRACK ON CONTACT AREA ARE NOT ACCEPTABLE
9. MATERIAL SHOULD BE FULFILLED ROHS CRITERION
10. DIMENSION MARKED WITH ARE CRITICAL DIMENSION

深圳盛阳通科技有限公司

第三角法	品名	客户料号	日期	单位
未注公差参见标准	弹片		2014/04/17	mm
0 = ±0.15	规格	表面处理	绘图	比例
0.0 = ±0.05	2.8*1.5*1.4 H	镀金	审核	1:1
0.00 = ±0.02	材质	图号	确认	版本
0.000 = -		WXYT-3145		REV: A

请勿实测图纸