

1

2

3

4

5

6





7

8



HALOGEN FREE



REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECR14***	NEW RELEASE PER DEVELOP	2014/7/30	WUXIANG	PANNER	PANNER

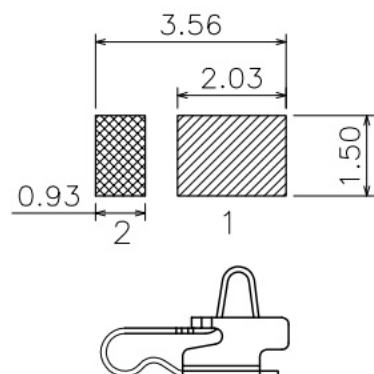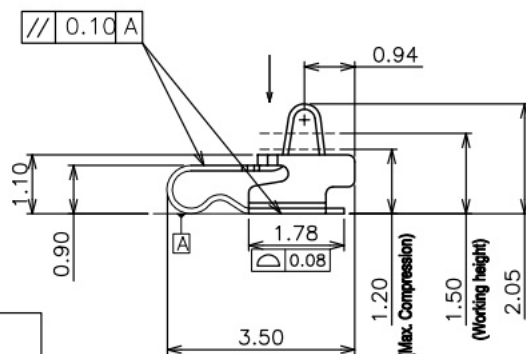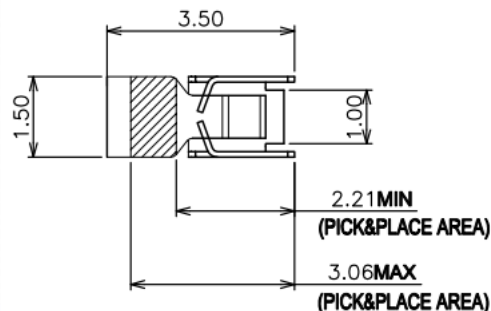

- 1: 此处为焊盘参考数据图,
2: 此处PCB板需避开, 避免接触短路。



NOTES:

1.MATERIAL:

1-1:STAINLESS STEEL ,T=0.10mm.

2.FALSEH:

2-1: 1~3u" MIN. AU PLATING ON CONTACT ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER AREA,
30~150u" NICKEL UNDERPLATING OVER ALL.

3.SPECIFICATIONS:

3-1:CONTACT RESISTANCE: 50mΩ MAX.

3-2:OPERATING TEMPERATURE:-20°C~+65°C

3-3:FORCE OF 1.50mm:0.50N MIN.ON CONTACT POINT.

3-4:MAX.BEAM DEFLECTION:0.85mm ON CONTACT POINT.

3-5:IMPEDANCE:50 OHM.

3-6:VSWR:1.5MAX.(DC~3GHz)

3-7:INSERTION LOSS:0.6dBMAX.(DC~3GHz)

4.DURABILITY: 500 CYCLES.

5.PACKING SPECIFICATION:REEL & TAPE.

PART NUMBER CODE:

4-00 - 43 463

① ② ③

① 零件类:

4: 五金类零件

② 产品系列:

00: 手机五金附件

③ 产品流水号

463:2.05H手机弹片

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN	DATE	深圳盛阳通科技有限公司
GENERAL X ±0.38	WUXIANG	2014/7/30	
X ±0.25	DESIGN	DATE	
XX ±0.13	WUXIANG	2014/7/30	
XXX ±0.05	CHECKED	DATE	
ANGLES ±3.0°	PANNER	2014/7/30	TITLE
SCALE 1:1	APPROVED	DATE	ANTENNA RF SPRING,SMT, Au PLATING,L3.5*W1.5*H2.05MM
SHEET 1 OF 1	PANNER	2014/7/30	SERIES W010-376-B
UNIT ITMM	CUSTOMER DRAWING	DWG NO. C-4-00-XX463	REV. A